

JOURNAL OF RESEARCH IN PHYSICAL SCIENCES

ISSN 1597 - 8093

Volume 6, Number 2, 2010

Published by the International Research and Development Institute in Association with
Kan Educational Books, No. 63 Itiam Street, P. O. Box 790, Uyo, Akwa Ibom State,
Nigeria.

First Published 2004

Copyright © 2010 International Research and Development Institute.
www.irdionline.org

All right reserved. No part of this Journal may be reproduced or transmitted in any form
or by any means without the written permission of the International Research and
Development Institute.

Printed and Bound in Nigeria.

JOURNAL OF RESEARCH IN PHYSICAL SCIENCES

ISSN 1597 - 8093

Volume 6, Number 2, 2010

EDITORIAL BOARD

Editor

Dr. V. A. Aladeselu

Associate Editors

Dr. J. E. Osemwekhae
Dr. A. A. Ayi
Prof. Sada
Dr. C. O. Awalla
Dr. F. Okoro
Dr. O. E. Monday
Dr. A. Jideonwo
Dr. M. D. Selema
Dr. O. B. Ishola

Dr. A. E. Adewumi
Dr. S. C. Chiemeka
Dr. J. M. Okuo
Dr. T. C. Uzomah
Dr. P. O. Ezema
Dr. G. Idemudia
Dr. T. U. S. Onyeobi
Dr. F. O. Akinpelu
Dr. A. O. Oyinloye

Assistants to the Editors

Samuel Hanson

Kufre Offiong

An Official Publication of the International Research and Development Institute

www.irdionline.org

JOURNAL OF RESEARCH IN PHYSICAL SCIENCES

ISSN 1597 - 8093

Volume 6, Number 2, 2010

EDITORIAL BOARD

Editor

Dr. V. A. Aladeselu
Department of Computer Science
University of Benin, City, Nigeria.

Associate Editors

Dr. J. E. Osemwckhae
Department of Mathematics
University of Benin
Benin City, Edo State, Nigeria.

Dr. Ayi A. Ayi
Department of Pure and Applied Chemistry
University of Calabar
Cross River State, Nigeria.

Dr. Ibrahim Sada
Department of Chemistry
Nigerian Defence Academy
Kaduna, Kaduna State, Nigeria.

Dr. C. O. Awalla
Department of Geology and Mining
Enugu State University of Science and Technology
Enugu, Enugu State, Nigeria.

Dr. Felix Okoro
Department of Computer Science
Ambrose Alli University
Ekpoma, Edo State, Nigeria.

Dr. Odin E. Monday
Department of Chemistry
Kogi State University
Anyigba, Kogi State, Nigeria

Dr. A. Jideonwo
Department of Chemistry
University of Benin
Benin City, Edo State, Nigeria.

Dr. Miabiye Dateme Selema
Department of Chemistry
Rivers State University of Science and Technology
Port Harcourt, Rivers State, Nigeria.

Dr. Olajuwon Bakaj Ishola
Department of Pure and Applied Mathematics
Ladoke Akintola University of Technology
Ogbomoso, Oyo State, Nigeria.

Dr. Adebile Emmanuel Adewumi
Department of Mathematical Sciences
Obafemi Awolowo University
Ile-Ife, Osun State, Nigeria.

Dr. Stella C. Chiemeké
Department of Computer Science
University of Benin
Benin City, Edo State, Nigeria.

Dr. James M. Okuo
Department of Chemistry
University of Benin
Benin City, Edo State, Nigeria.

Dr. T. C. Uzomah
Department of Pure and Industrial Chemistry
Imo State University
Owerri, Imo State, Nigeria.

Dr. P. O. Ezema
Department of Physics and Astronomy
University of Nigeria
Nsukka, Enugu State, Nigeria.

Dr. Godwin Idemudia
Department of Physics
Adamawa State University
Mubi, Adamawa State, Nigeria.

Dr. T. U. S. Onyeobi
Department of Geology
University of Benin
Benin City, Edo State, Nigeria.

Dr. F. O. Akinpelu
Department of Pure and Applied Mathematics
Ladoke Akintola University of Technology
Ogbomoso, Ogun State, Nigeria.

Dr. A. O. Oyinloye
Department of Geology, University of Ado-Ekiti
Ado-Ekiti, Ekiti State, Nigeria.

Articles for publication should be Send to: *The Managing Editor, International Research and Development Journals, Kan Educational Books, No. 63 Iflam Street, P. O. Box 790, Uyo, Akwa Ibom State, Nigeria.*

INTERNATIONAL RESEARCH AND DEVELOPMENT INSTITUTE

An independent institution established for the purpose of increasing understanding of development problems confronting the developing world through advance research and public education.

The International Research and Development Institute is an independent institution established for the purpose of increasing the understanding of research and development problems confronting the developing world. The institute assists in global capacity building for integrated global sustainable development through research into the problems of development practice and public policy. An integral part of this task is to develop local capacity which holds the key to the future of the developing countries.

In association with Government and the Academic Community, International Agencies; Non-governmental Organization, Foundations, Community Groups, Private Bodies and Individuals, the organization seeks to improve the quality of life worldwide in particular in the developing countries by providing a forum for exchange of ideas and a resource for public awareness. The institution assists policy makers and development experts in the Campaign to enhance integrated sustainable global development.

The institution examines development trends, particularly where there is a resources allocation problem. The organization attention is geared towards institution building which involves providing technical assistance and support to institution and community based network of projects.

The International Research and Development Institute Research are focus on specific issues and are communicated through publications, conferences, workshops, seminars, meetings and policy briefings. The result of the institution's research, training other programs is employed by Government, Policy Makers, the Media, the Academic Community, Action Groups, Non-governmental Organizations and all those concerned about third world development in general and as they relate to the entire international community.

In general the policies, programs activities of the International Research and Development Institute are aimed at increasing the understanding of the development problems facing the developing countries and to promote awareness of the importance of these countries to the developed countries in an increasingly interdependent international system.

International Research and Development Institute's financial support come from Government, Cooperation, Foundation, International Agencies and Private Individuals. The institute receives with pleasure monetary and non monetary gifts and assistance such as books, journals, computers, teaching/training aids and materials. The International Research and Development Institute may be named as a beneficiary of a trust agreement or property/money may be bequeathed to the institute by means of a legally executed will.

For more information contact the *Director General, International Research and Development Institute, 63 Itiam Street, P. M. B. 1239, Uyo, Akwa Ibom State, Nigeria*

E-mail: irdijournal@yahoo.com.

Tel: 08035857585

JOURNAL OF RESEARCH IN PHYSICAL SCIENCES

ISSN: 1597-8023

Volume 6, Number 2, 2010

S/No.	Contents	Authors	Pages
1.	Particles Swarm Intelligence for a Permutation Problem: The N-Queens Problem Approach.	Ojugo, A. A., Igbunu, R. O., Aghaware, F. O., Yoro, M. and Ugboh, E.	1-8
2.	Software Process Implementation-A Focus on the Nigerian Software Industry.	Aregbesola, M. K. and Akinkunmi, B. O.	9-14
3.	Proper Waste Disposal in Enugu; (An Appraisal), Rethinking Third World Development Beyond Empasse.	R. O. Ozobu, Blarabe Hussein and Olofin Oluchi	15-18
4.	Processing of Beta-B Hemihydrate (Caso41/2H2O) of Plasters from Calcium Sulphate Dihydrate Caso4.2H2O. (Selenite) for Suspended Ceilings in Construction Industry: Rethinking Third World Towards Development.	R. O. Ozobu	19-23
5.	Magnetic Phase Diagram in the Periodic Anderson Model (PAM): An Exact Diagonalization Approach.	Omamoke Onorenyakpo Enaroseha and Edwin Igherighe	24-29
6.	Interaction Between Two Continuous Variables in a Multiple linear Regression Model (An Application to Educational Research).	O. A. Nuga	30-34
7.	Parametric Studies of Silicon Solar Cell.	H. B. Langa and B. G. Bukar	35-46
8.	Analysis of Faults in Power Holding Company of Nigeria (PHCN) Power Supply Reported in Olorin Using Hierarchical Cluster Observations Method.	Usman, M. and Ibrahim, N.	47-52
9.	The Impact of Software Engineering Discipline on the Practice of Software Development in Nigeria.	Lawal, T. D., Salimon, I. R. and Ajibade, L. S.	53-58
10.	Assessing Internet Protocol Version Six (IPv6) Enabling Technology: Installation and Configuration.	Okafor Friday Onyema	59-63
11.	Sorption Kinetics of Ni ²⁺ , Cd ²⁺ and Pb ²⁺ Ions by African White Star Apple (<i>Chrysophyllum Albidum</i>) Sheel.	Abia, A. A. and Onwu, F. K.	64-70
12.	Preliminary Quality Evaluation of Water Resources in Ayegunle-Oka, Southwestern Nigeria.	A. O. Oba and G. J. Udom	71-77
13.	High-Speed Signal Processing in a Programmable Propagation Simulator.	A. Ibitola and O. E. Ehinlafa	78-83
14.	Extraction of Adhesive (Gum) from Okra/Okro Plant (<i>Albemoschus Esculentus</i>): Opportunities for Unemployed Science, Technology and Mathematics (STM) Graduates.	Igboegwu Ekene N.	84-87
15.	Analysis of Crime Rates in Major Cities in Nigeria.	Jubril, H. D., Akeyede, I. and Ogege, A. L.	88-95
16.	Microprocessor Controlled Transistor Analyzer.	Ezeonu S. O., Okonkwo G. N. and Uchegbune R. E.	96-102
17.	Science Fiction: The Writers Aid to the Development of Science and Technology in Third World Countries.	Yadok, Bizuum Godwill	103-106
18.	Effects of Plied Yarns on the Physical and Mechanical Properties of Plain Woven Fabrics.	A. S. Lawal and H. Hassan	107-110

HIGH-SPEED SIGNAL PROCESSING IN A PROGRAMMABLE PROPAGATION SIMULATOR

A. Ibitola and O. E. Ehinlafa

Department of Pure and Applied Physics,
Caleb University, Ikeja, Imota, Lagos. Lagos State, Nigeria

ABSTRACT

The real-time channel simulator described is an experimental apparatus designed not only for modelling a wideband channel, but also as a flexible machine for experimentation in propagation models and effects. In this paper, we describe the signal processing techniques used to model fading phenomena as well as the use of high-speed quadrature signal processing in the front-end of the simulator.

KEY WORDS: Propagation Simulator, Analog Signal Processing, Digital Signal Processing, Propagation Models, Wideband Channels.

INTRODUCTION

Cheap, reliable and repeatable tests of mobile communications gear are needed to check novel schemes of modulation and coding. For example, in order to test a new channel equalization algorithm, it is of critical importance that the algorithm be checked against a channel with varying types of impairments including fading and co-channel interference. Without a channel simulator, repeatable measurements are difficult, if not impossible. Furthermore, when a prototype is constructed, then we can get real-time measurements of the effects of channel "defects" on receiver performance. (See [1] for an example of such measurements). This is particularly true in the "real world", where propagation conditions are often intermittent and erratic. Non-real-time (software) channel simulators have been designed and built for testing the effects of varying propagation on co-channel interference, handoff prediction, bit error rates and so forth. While non-real time simulators are beneficial for confirming the predicted performance of a given modulation and coding scheme, they do not permit the evaluation of real equipment with fundamental limitations of power, weight and finite word length; not to mention bugs. The real-time channel simulator described in this paper is an experimental apparatus designed not only to model a wideband mobile channel, but also as a flexible machine for experimentation in propagation models and effects. To begin with, the underlying channel model will be described. Following this review, the signal processing algorithms, hardware and software will be given in detail.

PROPAGATION MODEL

Given a transmitted signal $T(t) = \text{Re}\{s(t)e^{j\omega_0 t}\}$,

where $s(t)$ is a complex valued information signal and ω_0 is the carrier frequency, the simulator's output must be $R(t) = \text{Re}\{\rho(t)e^{j\omega_0 t}\}$, where


$$\rho(t) = \sum_{k=1}^{\infty} \alpha_k s_k(t - \tau_k) e^{j\theta_k} + n(t) \quad (1)$$

In this case, each path from a transmitter to a receiver is described by its fading function amplitude (α_k), its carrier phase (θ_k) and its path delay (τ_k). The added received noise $\{n(t)\}$ is a time-varying signal added to the attenuated transmitted signal. Each path can have a noise function as well as a general noise function that all signals are subject to, such as a noise source close to the receiver. The complex information signal for a given path can be written in its component parts as

$$s_k(t - \tau_k) = I_k(t - \tau_k) + jQ_k(t - \tau_k) \quad (2)$$

For reasons to be discussed in the filter software section, the model requires the fading function to be complex valued. The model is illustrated in Fig.1. It is possible to replace the fading function with the aggregate noise function of the model if the τ_k is set to an appropriate delay and α_k models the noise. The noise in each path can also be included in each α_k function. The fading model will be discussed in section 4.

High-Speed Signal Processing in a Programmable Propagation Simulator

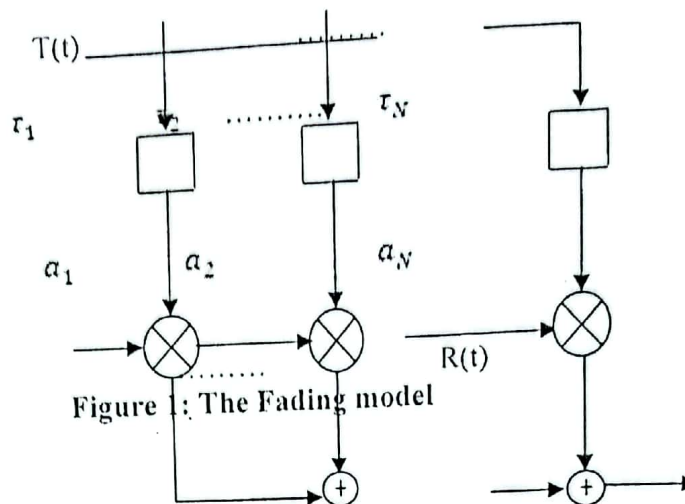

HARDWARE

Current cellular radio channels have a bandwidth of 6 MHz and are transmitted between 890 and 960 MHz. Therefore, the RF input signal must be down-converted before sampling. The 6 MHz bandwidth yields a 3 MHz baseband signal, and if the down modulation is performed to centre the down modulated signal around the baseband, a 10 MHz digital clock more than suffices for A/D conversion.

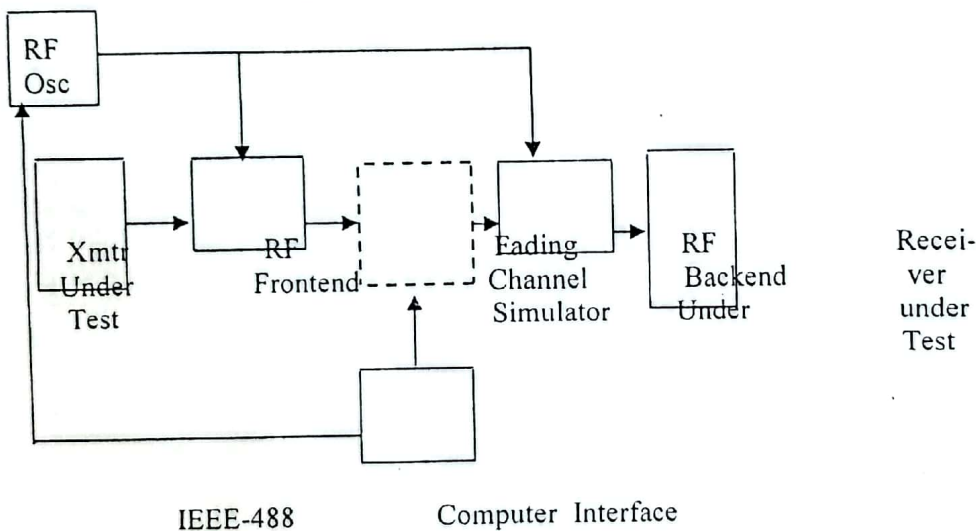


Figure 2: Simulator General Block Diagram

The RF oscillator is under the control of a workstation and is set to the proper frequency, depending on the transmitter carrier, to give the desired baseband into the analog-to-digital (A/D) converters that are part of the RF Frontend. The RF front-end heterodynes the input down to a 70 MHz IF by mixing the oscillator output and the RF input from the transmitter under test. Following a 1.25 MHz SAW bandpass filter the input signal is sampled by a fast A/D converter. The output of the converter is oversampled and filtered by a GrayChip GC1012 Digital Receiver under control of a small microprocessor. It outputs aligned I and Q channels [2]. The I and Q channels are run to the signal processor backplane via cables. Schussler [3]-[4] uses an analog complex modulation scheme to derive the inphase and quadrature (I and Q) components. Each of these are low pass filtered and passed to separate A/D converters. Here, however, we use a completely digital complex mixer.

The fading channel simulator is made up of twelve cards, each of which simulates one of the possible paths from transmitter to receiver. If we allow the digitized signal input to the simulator to be described by

$u(k) = I(k) + jQ(k)$ and the fading function generated for each path to be given by $h_i(k)$, then Figure 3

schematically shows the operation of one of the simulation cards.

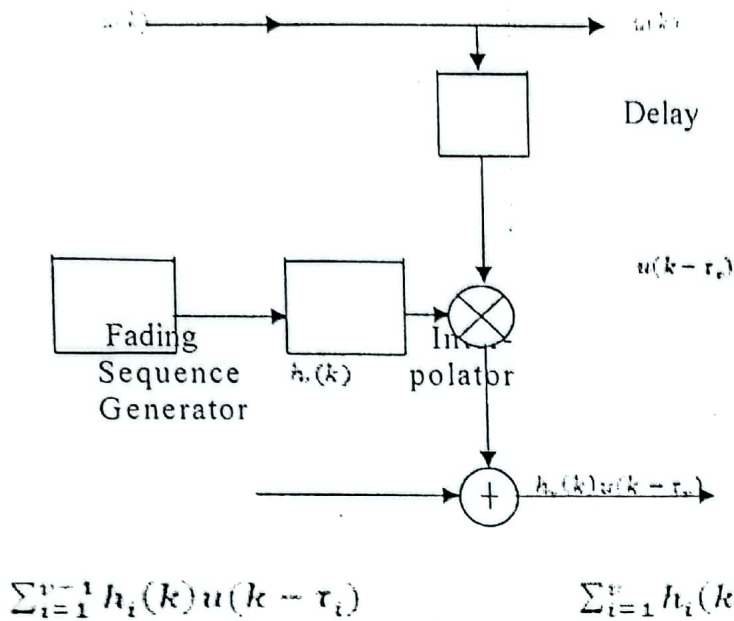


Figure 3: Simplified Simulator Board

The Fading Sequence Generator provides a complex value every 1/256 of the system clock rate. The digital interpolator then provides an input to the multiplier on every clock cycle; however note that the output is just latched, thereby providing a zero-order hold [5]. There are two multipliers, one for I and one for Q. Similarly, there are two adders to add the output from the previous card with the current card in real-time. At the end, the RF backend up-converts the simulator I and Q outputs back to RF, using the inverses of the above frequency conversion and sampling methods, so that the receiver under test can accept it as input. The Fading Channel Simulator block diagram of Figure 2 can then be given as Figure 4 where each block, v , performs the function of Figure 3.

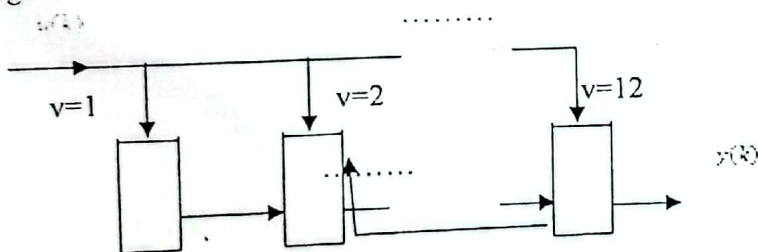


Figure 4: The Fading Channel Simulator

SOFTWARE

Fading coefficient generation

The Fading Sequence Generator of Fig. 3 is modeled as shown in Figure 5.

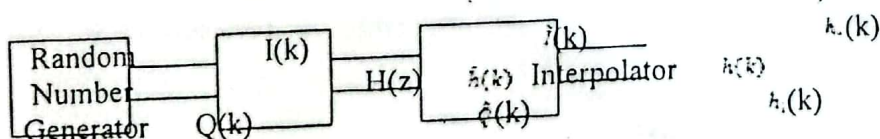


Figure 5: The Fading Sequence Generator

The statistical average of the fading functions are Rayleigh distributed. Such a process can be simulated by choosing two numbers, one for I and one for Q, with mutually independent Gaussian statistics that have zero mean and equal unit variance. The Random Number Generator of Figure 5 takes uniformly distributed and independent white noise random numbers and converts them into Gaussian distributed random numbers by shuffling and adjusting the mean. A pair of these Gaussian numbers are taken to be the real and complex (I and Q) parts of the fading sequence. However, these numbers alone do not lead to power spectra for the process that agree with

High-Speed Signal Processing in a Programmable Propagation Simulator

measured data. Therefore, the transfer function, $H(z)$, must transform the power spectra into one that corresponds to the environment, including the type of antenna in use and the speed of the vehicle. Both Clarke [6] and Bajwa and Parsons [7] have verified the received power spectrum at an antenna can be represented by one of the three power spectra in Figure 6.

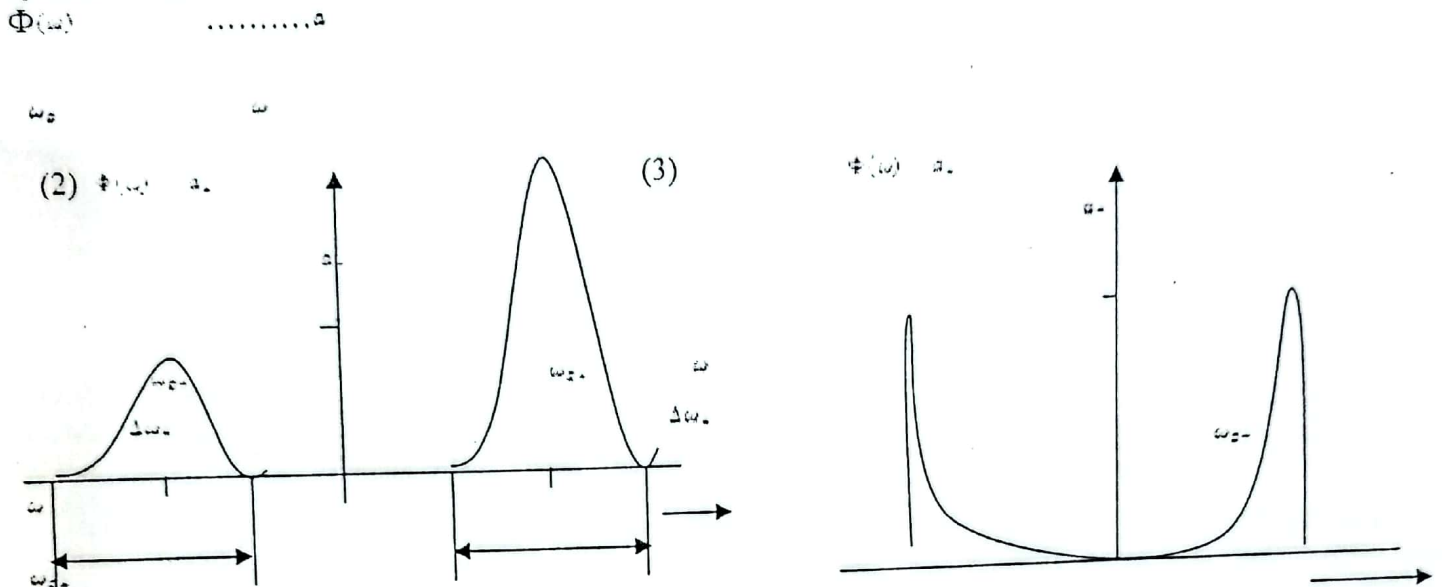


Figure 6: The Fading Model Power Spectra

Case number one is the typical spectrum that a vertical monopole antenna receives from a line of sight transmission or from a large amount of local scattering. Its power density spectrum, $\Phi^{(1)}(\omega)$, is approximated by

$$\Phi^{(1)}(\omega) = \begin{cases} \frac{a_+}{\sqrt{1 - (\omega/\omega_D)^2}} & |\omega| < \omega_D \\ 0 & |\omega| > \omega_D \end{cases} \quad (3)$$

where ω_D is the Doppler frequency (f from equation (1) times 2π) and a_+ is its amplitude.

The second case of Fig. 6 occurs when signals come from directly ahead of or behind a moving train of pulses. The power spectra is approximated by a Gaussian shape

$$\Phi^{(2)}(\omega) = e^{-\omega^2/2} \quad (4)$$

that is shifted by the Doppler frequency ω_D . Note that the spectra can be non-symmetrical about $\omega=0$. Therefore, to simulate this power spectra, one must specify the two Doppler frequencies, ω_{D-} and ω_{D+} , the bandwidth of each spectra, $\Delta\omega_-$ and $\Delta\omega_+$, and the amplitude a_+ and a_- of each spectrum. Finally, the third spectrum in Fig. 6 occurs when echoes also incur scattering. It also represents the spectra seen by a vertical loop antenna in the plane of vehicle motion. It is characterized by:

$$\Phi^{(3)}(\omega) = a \frac{(\omega/\omega_D)^2}{\sqrt{1 - (\omega/\omega_D)^2}}$$

Note that it can also be asymmetrical about $\omega=0$; so two amplitudes, a_+ and a_- , and two Doppler frequencies, ω_{D-} and ω_{D+} , must be specified. With regard to equation (1), and the fact that mobile channels lie in the 890-960 MHz carrier range, it is possible to implement the power spectra shaping as either lowpass or bandpass digital filters. A higher carrier frequency would have a higher Doppler shift for a vehicle traveling at some velocity. Then, in modeling an environment at maximum shift conditions, that is, using 960 MHz carrier with a mobile velocity of 80 Miles/hour (128.7 Km/hour) and all waves coming from in front of or behind the mobile train ($\cos(\alpha) = 1$), the Doppler shift would be only 411.8 Hz (2.589 K-rad). This justifies the feasibility of the lowpass/bandpass model.

Then, to simulate the first function in Fig. 6, it is possible to filter each of the noise sources with identical low pass filters, resulting in equal power spectra out for both the imaginary and real components. The Gaussian distributed noise generator supplies numbers that have identical power spectra to the input of each channel. It is not trivial, however, to generate the asymmetric spectra of the second and third functions of Figure 6. Lowpass filters (and bandpass filters that are transformed to lowpass filters) are symmetric about $\omega = 0$. Schussler describes the necessary operation as a Hilbert transformer implemented as two all-pass filters, each of which shapes either the upper half or the lower half of the filter spectrum. What is actually done is a complex modulation of the filtered real and imaginary parts to remove unwanted sidebands and join the two desired spectra together. The $H(z)$ block of Figure 5 can then be realized by figure 7:

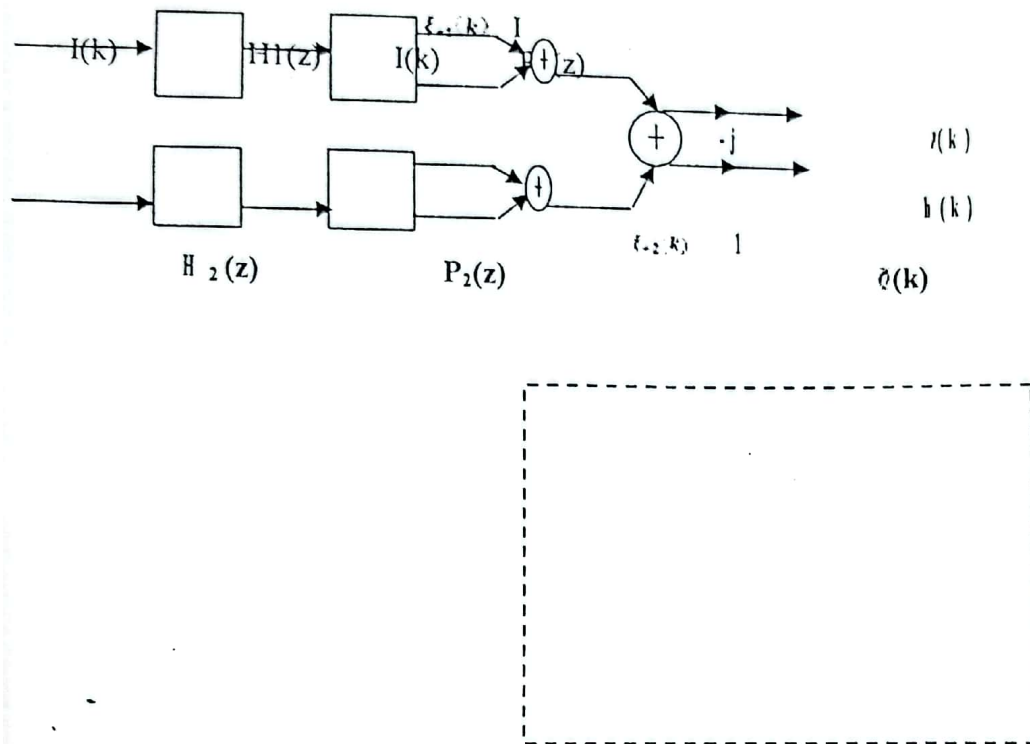


Figure 7: The Filter Model, $H(z)$

In Fig. 7, the filter functions $H_1(z)$ and $H_2(z)$ are symmetric lowpass or bandpass filters. At a minimum, they are fourth order. Their outputs can be labeled $\tilde{I}(k)$ and $\tilde{Q}(k)$ for the first filter model of Fig. 6. However, for the other two filter models, the rest of the network of Fig. 7 is required. P_1 and P_2 are all-pass phase splitting networks (see Gold and Rader [8] for the details including state diagram and coefficients derivation). The gain for each branch in the network is unity but the outputs, $\xi_{r1}(k)$ and $\xi_{i1}(k)$ are exactly 90° out of phase. By adding the outputs of P_1 (ξ_{r1} and ξ_{i1}) in the manner shown ($\xi_{r1} - j\xi_{i1}$), the spectrum for $\omega > 0$ is obtained and the spectrum for $\omega < 0$ is zero. Also, by adding the outputs of P_2 , the spectrum for $\omega < 0$ is obtained while the spectrum for $\omega > 0$ is zero. Then, the desired output spectrum $h(k)$ {for Fig. 6, parts (2) and (3)} is obtained by adding the upper and lower frequency parts together. Note then that $H_1(z)$ shapes the frequency response for $\omega > 0$ and $H_2(z)$ shapes the frequency response for $\omega < 0$. Also note that the frequency response of the functions in Fig. 6, parts (2) and (3) have zero magnitude at $\omega = 0$.

Software library

High-Speed Signal Processing in a Programmable Propagation Simulator

The fading coefficients are generated on a Digital Signal Processor DSP32C - ATT. With a 40 MHz clock, it has a 100 - ns cycle time and when effectively pipelined, can perform 10 MegaMACs (where MAC = Multiply Accumulate) per second. The output sample clock for the DSP-32C-ATT is generated by either an external oscillator or dividing down 10 MHz by 256 (to obtain $f \approx 39 \text{ KHz}$). The output of the DSP is latched before going to the complex multiplier. Since the sampling rate of the DSP is so slow, the fading output can use the serial port of the DSP. The DSP program is cross-compiled on the workstation and saved in a library. Depending on the fading function and noise environment desired, a different fading function can be loaded into the DSP's fast static program memory via the parallel interface shown in Fig. 2. Given the 39 KHz sampling rate of the fading channel and the 10 MHz instruction clock (there are 4 minor cycles per instruction), then the DSP can execute approximately 256 instructions in the sample loop. These cycles are divided into fading computation and noise computation. Obviously, the programs must fit within the tight time bounds of the sample clock. Slower sample rates clearly permit larger programs.

CONCLUSIONS

The novel features of this simulator include the fully digital means of dividing the inphase and quadrature inputs and generating quadrature outputs. A large dynamic memory in the computer interface enables the capture of input and output data for further analysis, while the fully digital quadrature processing effectively eliminates phase errors and overwrought RF processing. The high-speed programmable propagation simulator can process analogue signals at several MHz and can process digital signals at over 40 kB/s.

REFERENCES

- M. R. L. Hodges, S. A. Jensen and P. R. Tattersall, Laboratory testing of digital cellular radio systems, Br. Telecom Technol. J. 8, 1 (Jan. 2001), 57-66.
- L. Mitchell, Creating complex signal samples from a band-limited real signal, IEEE Transactions on Aero. and Elect. Systems AES-25, 3 (May, 2002), 425-427.
- H. W. Schiessler, J. Thielecke, K. Preuss, H. Brehm and M. Werner, A Digital Frequency-Selective Fading Simulator, An Intermediate Report about the State of the Development, Lehrstuhl für Nachrichtentechnik, Universität Erlangen-Nürnberg, Dec., 2003.
- H.W. Schussler, J. Thielecke, K. Preuss, W. Edler and M. Gerken, A Digital Frequency-Selective Fading Simulator, Frequenz-43, 2 (Jan., 2001), 47-55.
- R. Fitzgerald and W. Anderson, Spectral Distortion in Sample Rate Conversion by Zero Interpolation, IEEE Trans. ASSP, ASSP-40, 6 (June, 2007), 1576-1578. Order Polynomial
- R. H. Clarke, A Statistical Theory of Mobile-Radio Reception, B.S.T.J., Jul-August 1995, 957-1000.
- J. D. Parsons and A. S. Bajwa, Small-Area Characterization of UHF Urban and Suburban Mobile Radio Propagation, IEE Proceedings, Part F-129, 2 (April, 2007), 102-109.
- B. Gold and C. M. Rader, Digital Processing of Signals, McGraw-Hill, 1999.
- Parsons. J.D.: "Digital Signal Processing", <http://www.dspelectronics.com>, 2009.